


■ Size List : $\phi D \times L$ (mm)

ESR [m Ω MAX. at 100kHz, 20°C]

Maximum permissible ripple current [mA r.m.s. at 100kHz, 105°C]


| R.V. μF | 4 V | | | 6.3 V | | | 10 V | | |
|-----------------|------------------------------------|-----|-------------------|------------------------------------|-----|-------------------|------------------------------------|-----|-------------------|
| | Case size ($\phi D \times L$) | ESR | Ripple current | Case size ($\phi D \times L$) | ESR | Ripple current | Case size ($\phi D \times L$) | ESR | Ripple current |
| 100 | | | | 6.3 × 6.0 | 50 | 1120 | 8 × 10.5 | 30 | 1550 |
| 220 | | | | | | | 8 × 10.5 | 30 | 1550 |
| 330 | | | | | | | 8 × 10.5 | 30 | 1550 |
| 390 | | | | 8 × 10.5 | 30 | 1550 | 10 × 10.5 | 25 | 2090 |
| 470 | 8 × 10.5 | 30 | 1550 | 10 × 10.5 | 25 | 2090 | 10 × 10.5 | 25 | 2090 |
| 560 | | | | 10 × 10.5 | 25 | 2090 | | | |
| 680 | 10 × 10.5 | 25 | 2090 | | | | | | |
| 820 | 10 × 10.5 | 23 | 2180 | | | | | | |

■ Dimensions

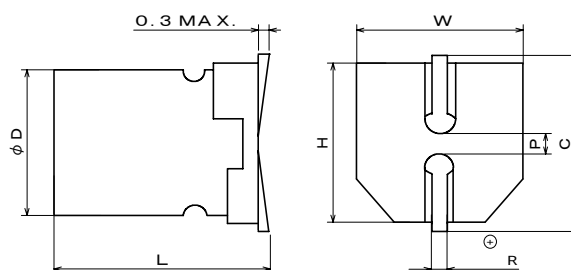

| D +0.5MAX. | L ±0.3 | W ±0.2 | H ±0.2 | C ±0.2 | R | P ±0.2 |
|------------|--------|--------|--------|--------|-----------|--------|
| 6.3 | 6.0 | 6.6 | 6.6 | 7.3 | 0.5 ~ 0.8 | 2.2 |
| 8 | 10.5 | 8.3 | 8.3 | 9.0 | 0.7 ~ 1.0 | 3.2 |
| 10 | 10.5 | 10.3 | 10.3 | 11.0 | 1.1 ~ 1.4 | 4.6 |

■ Model No.

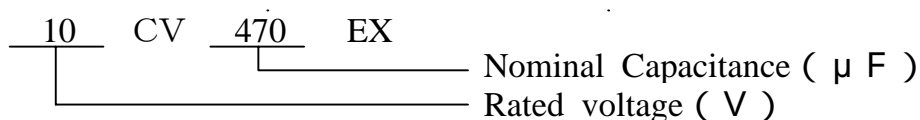

■ Reference

SANYO Electronic Components Co., Ltd.

Sales Dept, Osaka office

1-1, Sanyo-cho, Daito City, Osaka, Japan

Telephone 072-870-6306

Fax. 072-870-1174

Sales Dept, Tokyo office

1-1-10, Ueno, Taitoku, Tokyo, Japan

Telephone 03-3837-6242

Fax. 03-3837-6385

Sun Electronic Industries Corporation

Head, office

1-1-18, Okayama-Higashi, Shijyonawate-City, Osaka, Japan

Telephone 072-876-1421

Fax. 072-879-0395